


Generator set
Sound-proof type
WPS13S

SPECIFICATIONS



1 Standards & Conditions

Design Standards

The designs and the productions are in conformity with:

- Conformance Européenne (CE)
- China Compulsory Certification (CCC)
- TLC Quality Certification (TLC)
- ISO8528-1995
- GB/T2820-1997

Environmental Operating Conditions

- Installation place: Outdoors or indoors (well ventilated).
- Ambient temperature: -25°C to 45°C. The coolant heater is needed when the temperature is below 5°C
- Humidity: Less than 80%.
- Altitude: Below one thousand (1000) meters above sea Level.

Factory Inspection

- Inspection items.
- Protection devices working test.
- Starting ability in normal temperature.
- 50% rated power load moment capability.
- Voltage deviation and speed variation: 0%, 25%, 50%, 75%, 100%, 110% Load.

Painting Process

- Painting process specifications and colors are based on the manufacturer's standard.
- The customer could also choose the color which the manufacturer offers.


2 General Features

- Perkins engine 403D-15G
- Close coupled to a Leroy Somer alternator LSA40VS2
- Microprocessor control module PLC-702
- SCHNEIDER main circuit breaker: 3-Phase 20A
- Rotate speed governor: Mechanical governor
- Excitation System: SHUNT
- A.V.R. model: R220
- Key switch

- Emergency stop switch
- ATS (automatic transfer switch) receptacle
- 1x12V sealed for life maintenance free battery
- Lockable battery isolator switch
- Powder coated canopy
- 50°C radiator
- Oil pump on the engine
- Steel base frame with forklifts
- Vibration isolators between the engine/alternator and base frame
- Dry type air filter
- Base fuel tank for 11 hours running
- Drain points for fuel tank
- Operation Manual / Parts List/ Specifications

3 Equipment Specification

General technical data

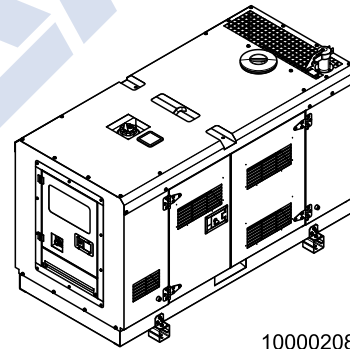


1000020899-AP1-A9

Model.....	WPS13S		
Structure type	RS		
Tank capacity.....	50L		
Dry weigh.....	641kg		
Noise level @7m	54.6dBA		
Dimensions L×W×H.....	1800×850×1208mm		
Standby Power	14kVA/11kW		
Prime Power	13kVA/10kW		

Voltage	380V	400V	415V
Ampere	20A	19A	18A


Diesel Engine

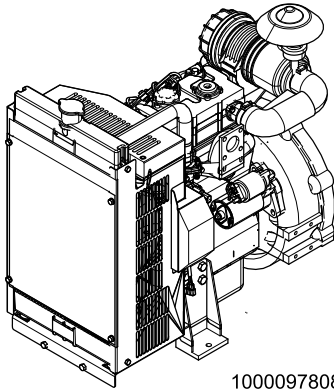

1000097808-AP1-B2

Engine Manufacturer/Brand.....	Perkins
Engine Model.....	403D-15G
Dimensions L×W×H.....	820×476×791mm
Dry Weigh (approx.).....	197kg
Number of Cylinders.....	3
Bore.....	84mm
Stroke.....	90mm
Displacement.....	1.496L
Compression Ratio.....	22.5
Type of Injection.....	Indirect injection
Intake System.....	Natural aspirated
Intake Resistance.....	≤6.4kPa
Cooling System.....	Water cooled
Fan.....	Pusher
Battery Voltage.....	12V
Type of Fuel.....	EPA2D 89.330-96/CEC RF-06-99
Type of Oil.....	API-CH-4/ ACEA E5
Oil Capacity.....	6.0 L
Type of Coolant.....	Glycol mixture
Coolant Capacity.....	6.0L
Back Pressure.....	≤10.2kPa
Standby Power.....	13.5kW
Continuous Power.....	12.2kW
Fuel Consumption(100%load).....	264g/kWh

Alternator

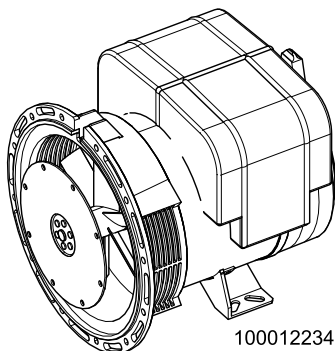


1000122348-AP1-A2

Alternator Manufacturer/Brand..... Leroy Somer

Alternator Model.....	LSA40VS2
Exciter.....	Brushless
Cooling Fan.....	Cast alloy aluminum
Windings.....	100% copper
Insulation Class.....	H
Winding Pitch.....	2/3
Terminals.....	12
Drip Proof.....	IP23
Altitude.....	≤1000m
Overspeed.....	2250rpm
Air Flow.....	0.06m³/s(50HZ),0.072m³/s(60HZ)
Voltage Regulation.....	±1.0%
Total harmonic TGH / THC at no load < 3 % - on load < 2%	
Telephone Interference.....	THF<2%;TIF<50

PLC-702 Control System

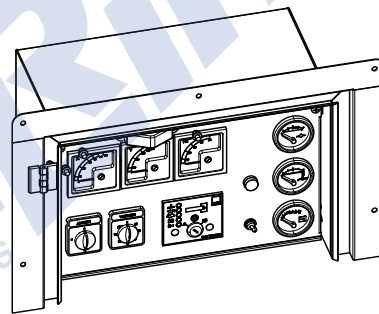

1000093953-AP1-A2

PLC-702 key manual start module is a manual engine control module designed to control the engine via a key switch and push buttons on the front panel. The module is used to start and stop the engine and indicate fault conditions, automatically shutting down the engine and giving a true first up fault condition of an engine failure.




Standard Control Function

- Manual Engine Control Module
- Low Oil Pressure
- High Engine Temperature
- Auxiliary Shutdown
- Overspeed Protection
- Protection hold-off timer
- Charge Failure warning


4 Overall Dimensions

1000020899-DR1-A9

Dry weight	641Kg
Fuel tank capacity	50L
Dimensions LxWxH	1800x850x1208mm

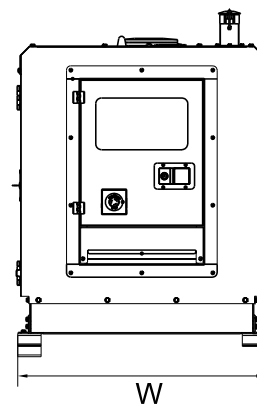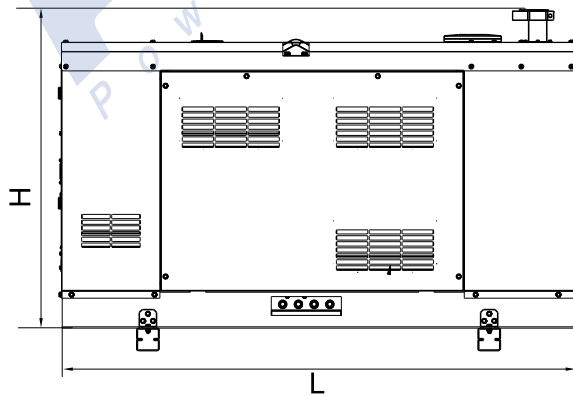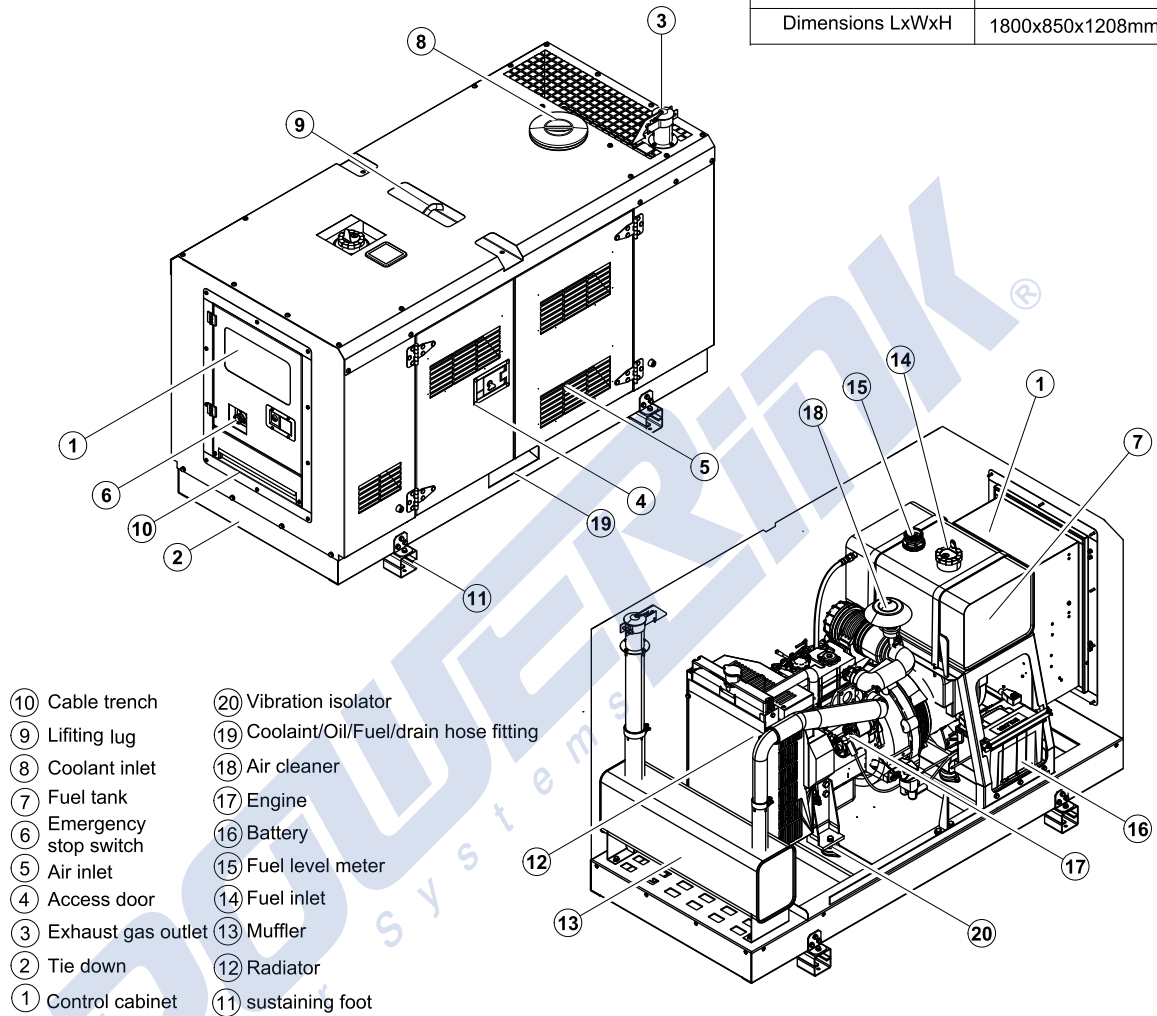


5 Control System

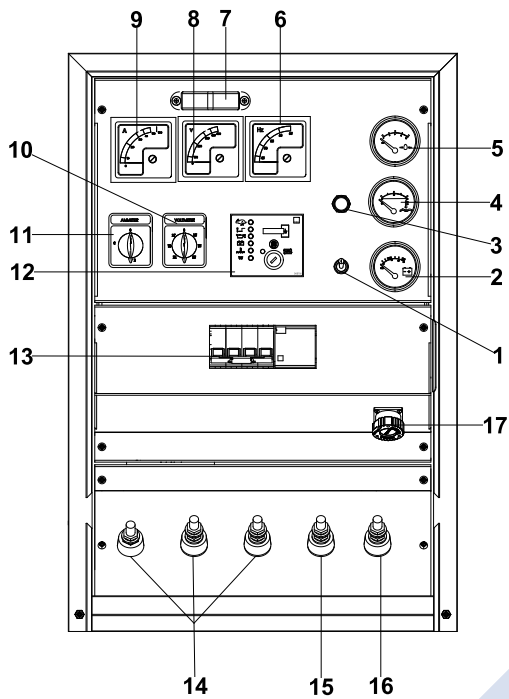

Control & field wiring cabinet

Ref.	Description
1	Control cabinet lamp switch
2	Battery voltage meter
3	Charge indicator
4	Oil pressure meter
5	Water temperature meter
6	Frequency meter
7	Control cabinet lamp
8	Voltage meter
9	Current meter
10	Voltmeter change-over switch
11	Ammeter change-over switch
12	Control module
13	Main circuit breaker
14	Live wire terminals
15	Neutral wire terminal
16	Ground wire terminal
17	ATS connector

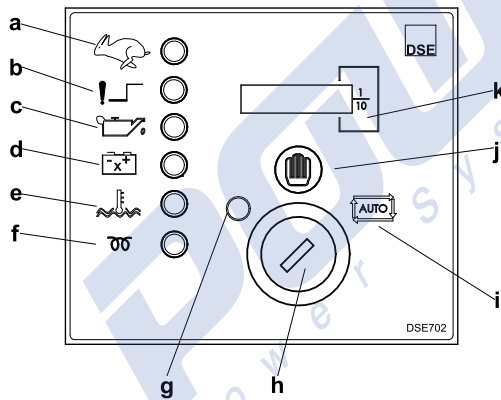

Control panel

a	Over speed protection LED
b	Alarm LED
c	Low oil pressure protection LED
d	Charge failure warning LED
e	High engine temperature protection LED
f	Pre-heat LED
g	Stop model position
h	Control module key switch
i	Auto start position
j	Manual start button
k	Time counter

1000020899-A9-E

01.2011

POWERLINK[®]
Power Systems

<http://www.powerlinkgenset.com>

E-mail: info@powerlinkgenset.com

*Specification may change without prior notice. For more info.,
contact Power Link or your local distributors please.*