


Generator set

Containerized type

HVC1500S

SPECIFICATIONS



HV series

HVC1500S

50 Hz @ 1500rpm, 3300V

POWERink
Energy Systems

1 Standards & Conditions

Design Standards

The designs and the productions are in conformity with:

- Conformance Européenne (CE)
- ISO8528-5:2005
- GB/T2820.5-2009

Environmental Operating Conditions

- Installation place: Outdoors or indoors (well ventilated).
- Ambient temperature: -25°C to 50°C. The coolant heater is needed when the temperature is below 5°C
- Humidity: Less than 80%.
- Altitude: Below one thousand (1000) meters.

Factory Inspection

- Inspection items.
- Protection devices working test.
- Starting ability in normal temperature.
- 50% rated power load moment capability.
- Voltage deviation and speed variation: 0%, 25%, 50%, 75%, 100%, 110% Load.

Painting Process

- Painting process specifications and colors are based on the manufacturer's standard.
- The customer could also choose the color which the manufacturer offers.


2 General Features

- Cummins engine KTA50-GS8
- Close coupled to Leroy Somer alternator LSA52.2XL65
- Microprocessor control module PLC-500
- HV Switchgear Panel (optional) : ABB 630A
- PT Cabinet (optional)
- DC Power Cabinet (optional)
- Rotate speed governor: Electrical governor
- Excitation System: AREP
- A.V.R. Model: R448
- Key switch
- Emergency stop switch

- 4x12V/200AH sealed for life maintenance free battery
- Lockable battery isolator switch
- Powder coated canopy
- 50°C radiator
- Fire extinguisher
- Heat exchanger
- Coolant heater
- Oil pump on the engine
- Steel base frame with forklifts
- Vibration isolators between the engine/alternator and base frame
- Dry type air filter
- Drain points for fuel tank
- Fuel inlet pump and it's control box for the fuel tank
- Added fuel-water separator for fuel tank
- Operation Manual / Specifications

3 Equipment Specification


General technical data

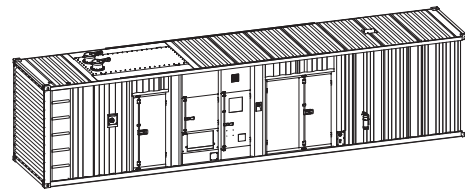

Model..... HVC1500S
Structure type C
Fuel tank.....2400L
Dry weight..... 16840kg
Noise level @7m80dBA
Dimensions L×W×H.....12192x2438x3153mm
Standby Power 1675kVA/1340kW
Prime Power..... 1500kVA/1200kW
Voltage/Ampere 3300V/262A


Genset Fuel Consumption					
Frequency/Load	25%	50%	75%	100%	110%
50Hz (L/h)	88	167	238	309	345

Diesel Engine

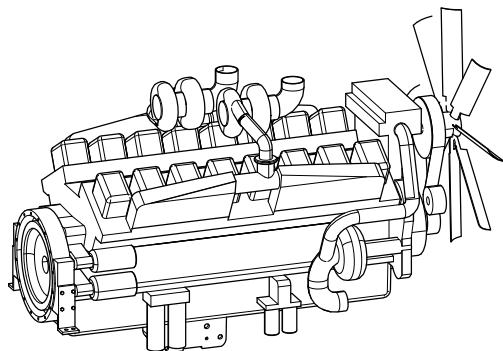


Engine Manufacturer/Brand.....	Cummins
Engine Model.....	KTA50-GS8
Dimensions L×W×H.....	3100x1620x2065mm
Dry Weigh (approx.)	5360kg
Number of Cylinders.....	16
Bore.....	159mm
Stroke.....	159mm
Displacement.....	50.3L
Compression Ratio.....	14.9
Type of injection.....	Direct injection
Intake System.....	Turbocharged and aftercooled
Intake Resistance.....	6.23kPa
Cooling System	Water cooled
Fan	Push
Battery Voltage.....	24V
Type of Fuel.....	NO.2 or ASTMD975
Type of Oil	CF4/SG15W-40
Oil Capacity	177L
Type of Coolant	Glycol mixture
Coolant Capacity engine only.....	161L
Back Pressure.....	≤10kPa
Standby Power	1429kW
Prime Power.....	1287kW

HV Alternator

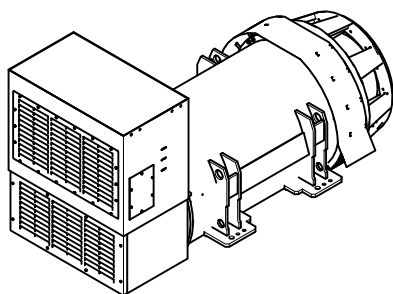

Alternator Manufacturer/Brand	Leroy Somer
Alternator Model	LSA52.2XL65
Exciter.....	Brushless
Cooling Fan	Cast alloy aluminum
Windings.....	100% copper
Insulation Class	H
Winding Pitch.....	5/6
Terminals	6
Drip Proof	IP23
Altitude.....	≤1000m
Overspeed	2250rpm
Air Flow.....	2.5m³/s
Voltage Regulation	±0.5%
Total harmonic TGH / THC	< 3.5%
Telephone Interference.....	FHT<2%;TIF<50


PLC-500 Control System

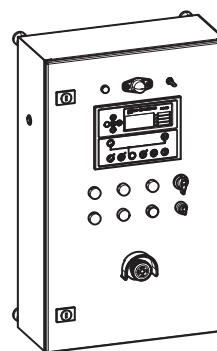



PLC-500 is a microprocessor based control unit containing all necessary functions for protection of the genset and the breaker control. Furthermore, it contains all necessary three-phase measuring circuits and presents all values and alarms on the LCD display. The module has the function of load sharing which enables the module to share the active load (kW) equally when operating in parallel with other gensets. The load sharing is performed so each genset takes a portion of the load that is calculated in percent according to the nominal power.

- Microprocessor control, with high stability and credibility
- Monitoring and measuring operational parameters of the genset
- Indicating operation status, fault conditions, all parameters and alarms
- Multiple protections; multiple parameters display, like pressure, temp. etc.
- Manual, automatic and remote work mode selectable
- RS232 & RS485 can be used at the same time
- Real time clock for time and date display, overall runtime display, 250 log entries


4 Overall Dimensions

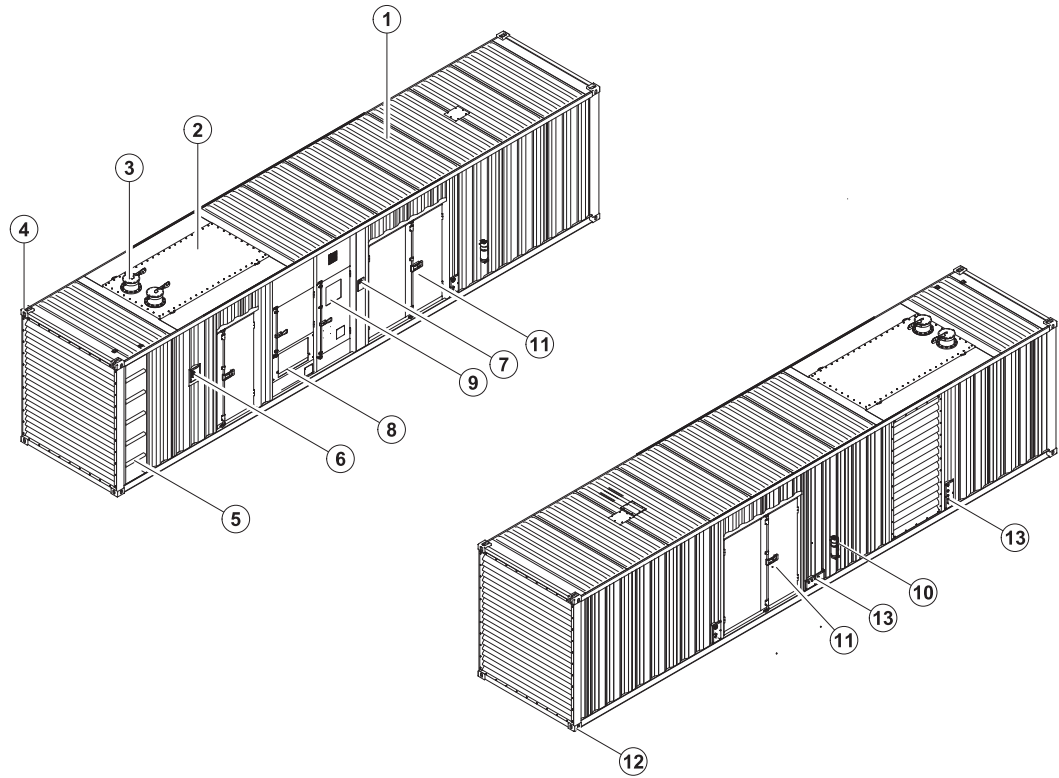

- | | |
|-------------------------|---|
| ⑦ Emergency stop switch | ⑬ External fuel inlet/return hose fitting |
| ⑥ Fuel inlet | Coolant/Oil drain hose fitting |
| ⑤ Ladder | ⑫ Fixing lug |
| ④ Lifting lug | ⑪ Access door |
| ③ Exhaust gas outlet | ⑩ Fire extinguisher |
| ② Muffler | ⑨ Control cabinet |
| ① Canopy | ⑧ Cable trench |

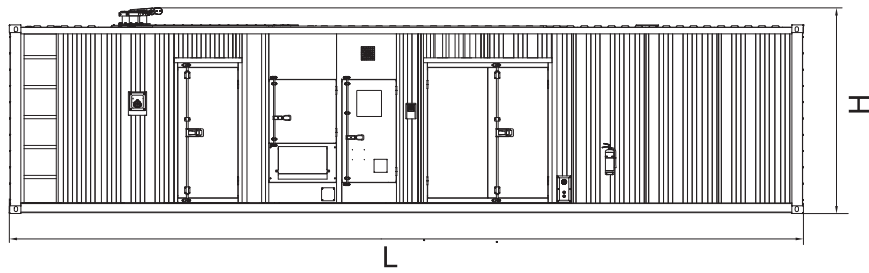

5 Switchgear Panel (optional)

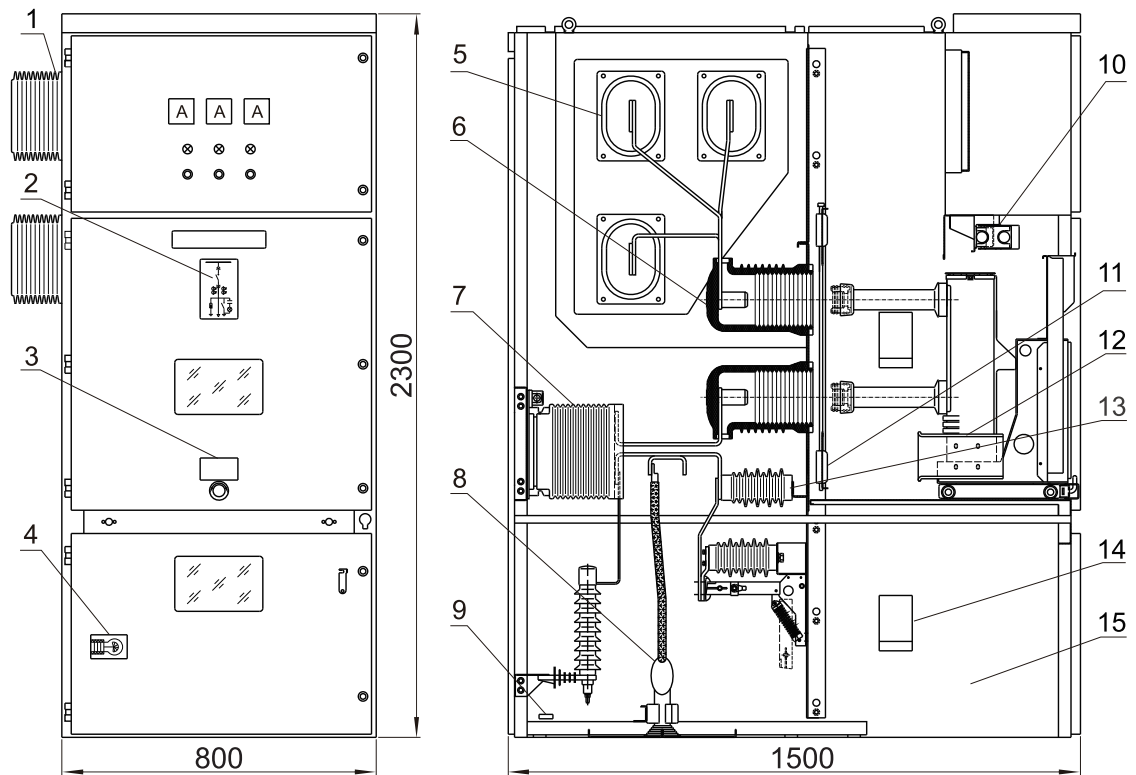

1. Passing bushing 2. Primary diagram 3. Nameplate 4. Lighting lamp 5. Main bus
 6. Contact box 7. CT 8. Incoming cable 9. Earthing bus bar 10. Secondary interlocking device
 11. Valve mechanism 12. CB trolley 13. Insulator 14. Heater 15. Frame

1000032041-A2-E
09.2024