

SPECIFICATION



Power Link the World

MODEL R1250C RG SERIES (FOR 50Hz DIESEL GENSET)

Revision: A2 (02/24)

To inquire the latest revision of
document, visit our website at:
www.powerlinkworld.com



RG series R1250C, Stage IIIA



50 Hz @ 1500rpm, 3-phase/4-wiring

1 Standards & Conditions

Design Standards

The designs and the productions are in conformity with:

- Conformance Européenne (CE)
- ISO8528-5:2005
- GB/T2820.5-2009

Environmental Operating Conditions

- Installation place: Outdoors or indoors (well ventilated).
- Ambient temperature: -25°C to 45°C. The coolant heater is needed when the temperature is below 5°C
- Humidity: Less than 90%.
- Altitude: Below one thousand (1000) meters above sea level.

Factory Inspection

- Inspection items.
- Protection devices working test.
- Starting ability in normal temperature.
- 50% rated power load moment capability.
- Voltage deviation and speed variation: 0%, 25%, 50%, 75%, 100%, 110% Load.

Painting Process

- Painting process specifications and colors are based on the manufacturer's standard.
- The customer could also choose the color which the manufacturer offers.


2 General Features

- Cummins engine QSK38-G5
- Close coupled to Stamford alternator S6L1D-G4
- Microprocessor controller PLC500
- Schneider main circuit breaker: 2000A,4P
- Rotate speed governor: ECU
- Excitation System: PMG
- A.V.R.Model: MX341
- Key switch
- Emergency stop switch
- ATS (automatic transfer switch) receptacle
- 2x12V/150AH sealed for life maintenance free battery
- Lockable battery isolator switch

- Lockable battery isolator switch
- Powder coated canopy
- Standard container
- 50°C radiator
- Fire extinguisher
- Oil pump on the engine
- Vibration isolators between the engine/alternator and base frame
- Dry type air filter
- Fuel tank with 6 hours running
- Drain points for fuel tank
- Fuel-water separator for fuel tank
- Operation Manual / Specification

3 Equipment Specification


General technical data

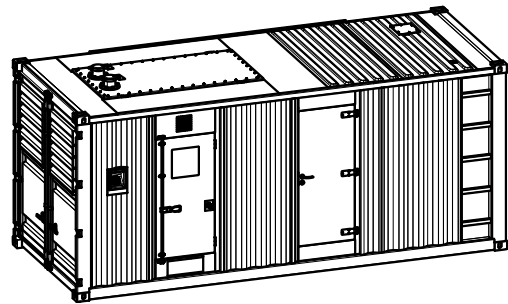

Model.....	R1250C
Tank capacity.....	1450L
Dry weight.....	15470kg
Sound pressure level @ 7m.....	76dBA
Dimensions L×W×H.....	6058x2438x2896mm
Standby Power.....	1375kVA/1100kW
Prime Power.....	1250kVA/1000kW


Voltage	380V	400V	415V	440V	
Ampere	1899A	1804A	1739A	1640A	
Genset Fuel Consumption					
Frequency/Load	25%	50%	75%	100%	110%
50Hz (L/h)	82	152	204	271	299

Dck Yf GrghYa

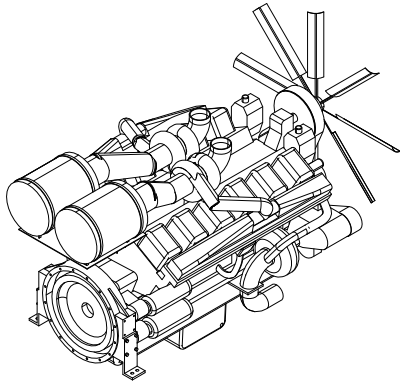


Engine Manufacturer/Brand	Cummins
Engine Model	QSK38-G5
Dimensions L×W×H	2885x1518.9x2005mm
Dry Weigh (approx.)	3723kg
Number of Cylinders	12
Bore	159mm
Stroke	159mm
Displacement	37.7L
Compression Ratio	15.0
Type of injection	Direct Injection
Intake System	Turbocharged, air-to-air charged cooled
Intake Resistance	≤6.23kPa
Cooling System	Water cooled
Fan	Pusher
Battery Voltage	24V
Type of Fuel	No.2 or ASTM D975
Type of Oil	API CH4/SG15W-40
Oil Capacity	166L
Type of Coolant	Glycol mixture
Coolant Capacity(engine only)	129L
Back Pressure	≤10kPa
Standby Power	1224kW
Prime Power	1107kW
Fuel Consumption(100%load)	271L/h

Alternator

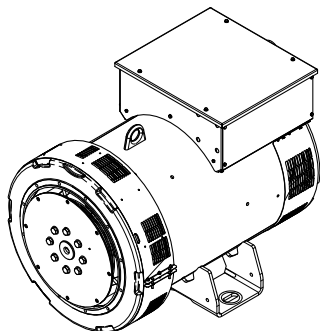

Alternator Manufacturer/Brand	Stamford
Alternator Model	S6L1D-G4
Exciter	Brushless
Cooling Fan	Cast alloy aluminum
Windings	100% copper
Insulation Class	H
Winding Pitch	2/3
Terminals	12
Drip Proof	IP23
Altitude	≤1000m
Overspeed	2250rpm
Air Flow	N/A
Voltage Regulation	±1.0%
Total Harmonic TGH / THCat no load < 1.5 % - on load < 5%	
Telephone Interference	THF<2%;TIF<50



PLC-500 Control System

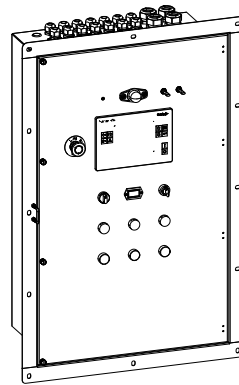



PLC-500 is a microprocessor based control unit containing all necessary functions for protection of the genset and the breaker control. Furthermore, it contains all necessary three-phase measuring circuits and presents all values and alarms on the LCD display. The module has the function of load sharing which enables the module to share the active load (kW) equally when operating in parallel with other gensets. The load sharing is performed so each genset takes a portion of the load that is calculated in percent according to the nominal power.

- Microprocessor control, with high stability and credibility
- Monitoring and measuring operational parameters of the genset
- Indicating operation status, fault conditions, all parameters and alarms
- Multiple protections; multiple parameters display, like pressure, temp. etc.
- Manual, automatic and remote work mode selectable
- RS232 & RS485 can be used at the same time
- Real time clock for time and date display, overall runtime display, 250 log entries


4 Overall Dimensions

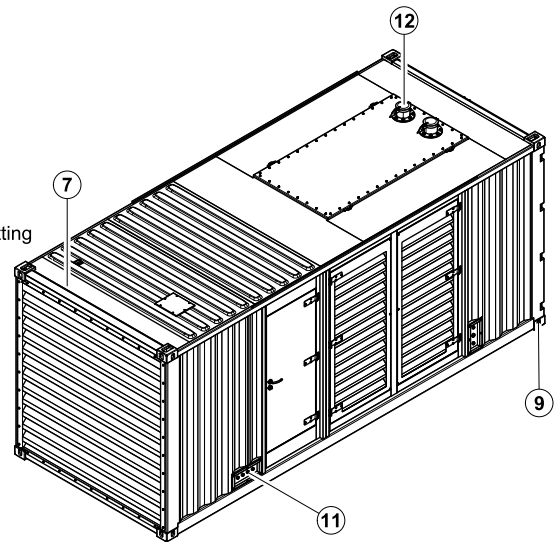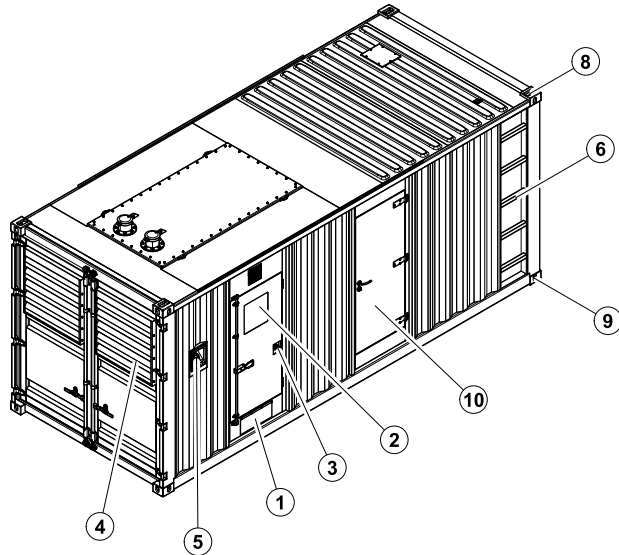


- | | |
|-------------------------|---|
| ⑥ Ladder | ⑫ Exhaust gas outlet |
| ⑤ Fuel inlet | ⑪ External fuel inlet/Return hose fitting
Coolant/Oil drain hose fitting |
| ④ Air inlet | ⑩ Access door |
| ③ Emergency stop switch | ⑨ Fixing lug |
| ② Control cabinet | ⑧ Lifting lug |
| ① Cable trench | ⑦ Canopy |

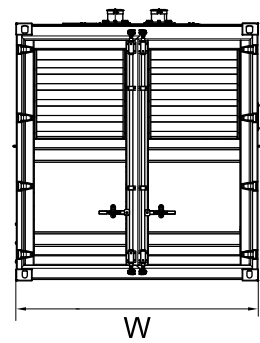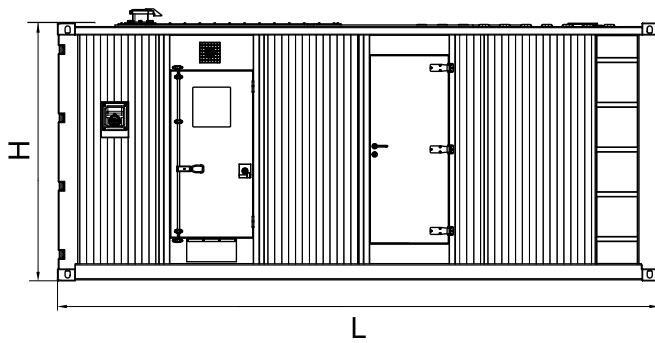

5 Control System

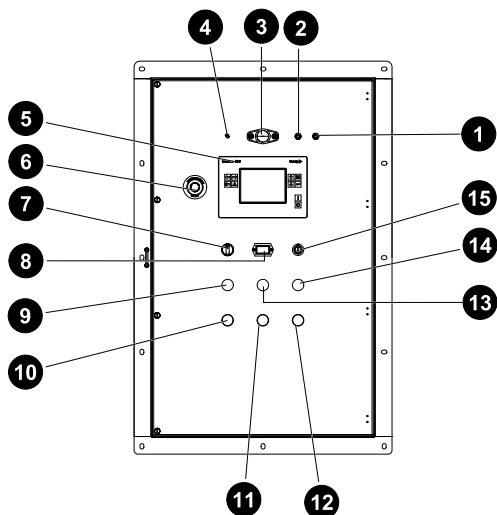

Control cabinet

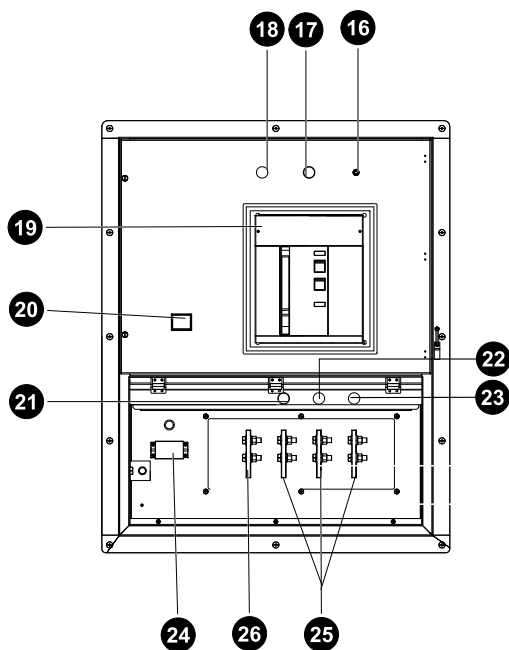

Field wiring cabinet

Ref.	Description
1	DC switch
2	Lamp switch
3	Control cabinet lamp
4	Charge indicator
5	Control module
6	Emergency stop switch
7	Oil pump switch
8	Time counter
9	Engine room fan off
10	Engine room fan on
11	Radiator fan on
12	GCB open(green)
13	Radiator fan off
14	GCB close(red)
15	Key switch
16	Lamp switch
17	GCB open(green)
18	GCB close(red)
19	Main circuit breaker
20	R.C.D
21	Busbar L1
22	Busbar L2
23	Busbar L3
24	Ground wire terminal
25	Live wire terminals
26	Neutral wire terminal

SPECIFICATION

RG SERIES DIESEL GENSET

R1250C

Revision: A2 (02/24)

To inquire the latest revision of
document, visit our website at:
www.powerlinkworld.com

